



DATASHEET

Rally Board 65

Simple all-in-one solution

Everything you need to quickly add video to meeting rooms and open spaces. Experience all-in-one video conferencing that integrates crystal clear video, powerful audio, and AI-driven features, all integrated into a single 65-inch touchscreen. Set it up in just a few simple steps with

minimal need for onsite IT support. Flexible mounting and remote configuration mean you can get Rally Board 65 up and running in minutes.

Built for flexibility



Cart with camera above



Table stand with camera below




Wall mount with camera below

Designed for flexibility, Rally Board 65 is made for the way you meet. It works seamlessly with leading platforms like Microsoft Teams, Zoom, and Google Meet* in Android, PC, or BYOD mode, so you can easily adapt Rally Board 65 for current and future needs. Plus, it provides multiple mounting options**, so you can add it to any open space or meeting room. It's made to deploy with the camera above or below the screen to allow all participants to maintain natural eye contact in all spaces.

*For the latest information on certification and compatibility, see www.logitech.com/support/vc-certifications

**Table stand is included in box, compatible with standard VESA wall mounts, and optional Rally Board 65 Cart is available as an accessory.

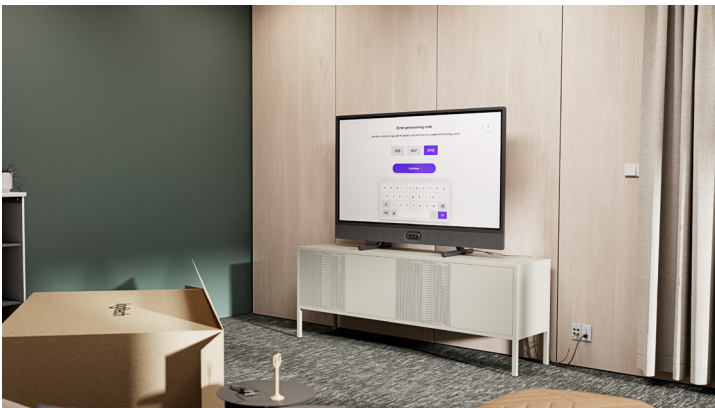

Ready in no time


Set up Rally Bar 65 right out of the box in just a few steps and minimize the need for onsite IT support. Plus, with Remote UI Access*, you can configure devices quickly from any location, ensuring seamless setup and control wherever you are.

*Remote UI Access is available for network-connected deployments.

Everyone is clearly seen and heard

Make sure everyone is seen and heard in meeting rooms and open spaces. AI-driven video and audio technologies — RightSight 2 and RightSound 2 — ensure optimal framing and clear sound for every participant. Depth Blur* helps eliminate distractions by defining an area of focus in open spaces and blurring areas beyond it.

*Depth Blur will become available with a future software update.

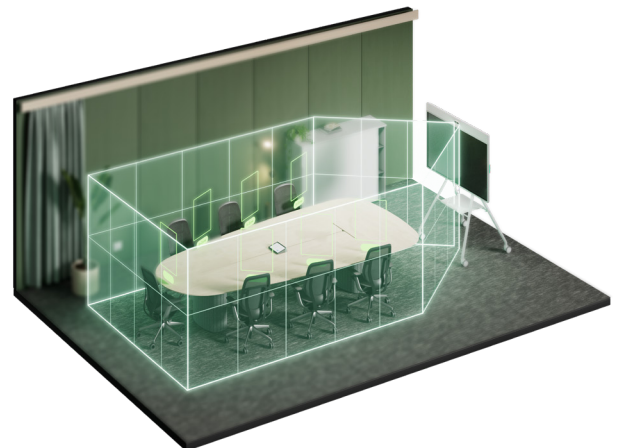



Exceptionally sharp video

Capture high-quality video no matter the space, thanks to the one-inch image sensor and custom-designed lens that enable a wide 115° field of view.



Designed with privacy in mind

Feel secure using built-in privacy control — an automatic shutter opens and closes with each meeting, while a status light clearly indicates when the camera and mic are active.



Clear and crisp audio

Enjoy crystal-clear conversations with Rally Board 65, designed to deliver exceptional audio quality in any space. A powerful speaker system, optimized for open spaces, ensures that everyone can hear, while a far-reaching microphone array with AI-enabled algorithms filters unwanted noises and ensures everyone can be heard.

A service plan for all your rooms

Ensure business continuity and simplify management with Select, our comprehensive service plan. With 24/7 direct access to product experts, support within an hour, and advanced software features, you can keep your rooms and Logitech solutions ready for the next meeting. Select covers Rally Board 65 along with other associated Logitech devices in a workspace or room under an active warranty.



Next Life Plastics

The plastic parts in Rally Board 65 include up to 41%* post-consumer recycled plastic to give a second life to end-of-life plastic from old consumer electronics and help reduce our carbon footprint.

*Graphite: 41%, Off-white: 27%



| | |
|-------------------------------|--|
| System Requirements | 100-240v Internet connection: Wired or wireless Room solution software license (not included) |
| Platform Compatibility | For the latest information on certification and compatibility, see www.logitech.com/support/vc-certifications |
| Dimensions | Rally Board 65 (device only) Width: 59 in (1500 mm) Height: 39 in (989 mm) Depth: 3.0 in (76 mm) Weight: 101 lb (46 kg) VESA Standard MIS F 400x400mm and 400x200mm Rally Board 65 with included table stand Width: 59 in (1500 mm) Height: 41.4 in (1051 mm) Depth: 15.6 in (395 mm) Weight: 110 lb (50 kg) |
| Display | 65-inch LCD screen IR-based touch with 20 points of touch UHD 4K (3840 x 2160) screen resolution 16:9 aspect ratio Anti-glare coating Anti-fingerprint coating Contrast ratio: 5000:1 Typical Brightness: 400 nits Typical |
| General | Built-in components: Front microphone array, digital PTZ camera, dual full-range ported speakers, dual tweeters, ultrasonic emitter, cable management and retention system, integrated motorized privacy shutter, depth mapping camera, radar motion sensing, and environmental sensors Support for 2nd display, up to UHD 4K60 (3840 x 2160) Automatic motorized privacy shutter HDMI ingest at up to 4K60 (3840 x 2160) resolution Network protocol support: IPv4, IPv6 Proxy support: IP-based proxy, FQDN-based proxy, proxy using PAC file |
| Camera | Main camera Imaging sensor: 1-inch Resolution: 4K, 1440p, 1080p, 900p, 720p, and SD at 30fps Automatic motorized tilt based on device orientation Zoom: 4X HD digital zoom Distortion-corrected field of view: <ul style="list-style-type: none"> Diagonal: 115.7° Horizontal: 103.3° Vertical: 60.7° Depth mapping camera Diagonal field of view: 145° Horizontal field of view: 121° |

| Part Number | | |
|---------------------------------|------------|------------|
| Region | Graphite | White |
| USA/Canada/Mexico | 960-001697 | 960-001729 |
| EU/Korea/Indonesia | 960-001698 | 960-001730 |
| UK/Hong Kong/UAE | 960-001699 | 960-001731 |
| Switzerland | 960-001700 | 960-001732 |
| Australia/New Zealand/Argentina | 960-001702 | 960-001734 |
| India/South Africa | 960-001701 | 960-001733 |
| Brazil | 960-001714 | 960-001735 |
| Thailand | 960-001715 | 960-001736 |
| Israel | 960-001716 | 960-001737 |
| China | 960-001713 | 960-001739 |

| | |
|-------------------------|---|
| Speakers | Dual full-range ported speakers Driver: 2 x 70mm Sensitivity: 89 dB SPL at 1W/0.5 m Rated Power: 8W THD at 1W, 1 kHz <2% Dual high-frequency tweeters Driver 2 x 31mm Sensitivity: 93 dB SPL at 1W/0.5 m Rated Power: 8W THD at 1W, 4 kHz <2% |
| Microphones | Front microphone array Frequency response: 90 Hz - 16 kHz Sensitivity: -36 dB FS +/-1 dB @ 1 Pa Microphone data rate output: 48 kHz Pickup range: Up to 23 ft (7m) RightSound 2 <ul style="list-style-type: none"> AI Speech Enhancement removes transient and stationary noise Beamforming with AI Beam Selection AI Speech Detection AI Direction of Speech Acoustic Echo Cancellation and Residual Echo Suppression Rear microphone array Frequency Response: 90 Hz - 16 kHz Sensitivity: -36 dB FS +/-1 dB @ 1 Pa Microphone data rate output: 48 kHz |
| Sensors | Temperature Humidity Volatile organic compounds Carbon dioxide PM2.5 PM10 Radar Ambient light For the latest information on certification and compatibility, see www.logitech.com/support/vc-certifications |
| Interfaces | 1 x HDMI Out: up to 4K60 1 x HDMI In: up to 4K60 USB-A: 3 x USB 3.1 USB-C: 1 x Type C USB 3.1 with DP Alt Mode Line-Out: 3.5mm line-level audio output Network: 10/100/1G Ethernet Wi-Fi: 802.11a/b/g/n/ac Bluetooth: Bluetooth® Low Energy EXT: RJ45 reserved for future use |
| Power and Cables | Power supply: Built-in auto-sensing 100-240 V AC Cable: 9.8 ft (3 m) |
| Environmental | Operating temperature: 0 to 35° C Storage temperature: -40 to 60° C Humidity: 10 to 95% |
| Security | File-based encryption: AES-256 Data encryption: Symmetric Keys, PKI Device identity: Protected by device attestation Device access: Authenticated using API Key protection: Arm TrustZone, RPMB |
| Package Contents | Main device Tabletop legs (2) Power cord Stylus (2) VESA 100 PC mount Cable hook Assembly hardware and tools Documentation |
| Accessories | Rally Board 65 Cart Active USB Cable |



www.logitech.com/RallyBoard65

Contact your reseller or contact us at www.logitech.com/business

Logitech Americas
3930 North First St
San Jose, CA 95134 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2024 LOGITECH, the LOGITECH logo, the Logi logo, the NEXT LIFE PLASTICS logo, and the RECYCLED PLASTIC logo are trademarks or registered trademarks of Logitech Europe S.A. and/or its affiliates in the U.S. and other countries. All other trademarks are the property of their respective owners.

Published November 2024